

DOOSAN



DVF 6500/8000

Premium Vertical
5-axis Machining Center of
Rotary Table Ø650/800mm Class



**MACHINE
GREATNESS™**

Basic Structure

Provides high rigidity and stable structure by direct axis connection.

Travel distance

X-axis 750/1000 mm
(29.5 / 39.4 inch)

Y-axis 785/900 mm
(30.9 / 35.4 inch)


Z-axis 600/685 mm
(23.6 / 27.0 inch)

Rapid traverse

X-axis 45 m/min
(1771.7 ipm)

Y-axis 45 m/min
(1771.7 ipm)

Z-axis 45 m/min
(1771.7 ipm)

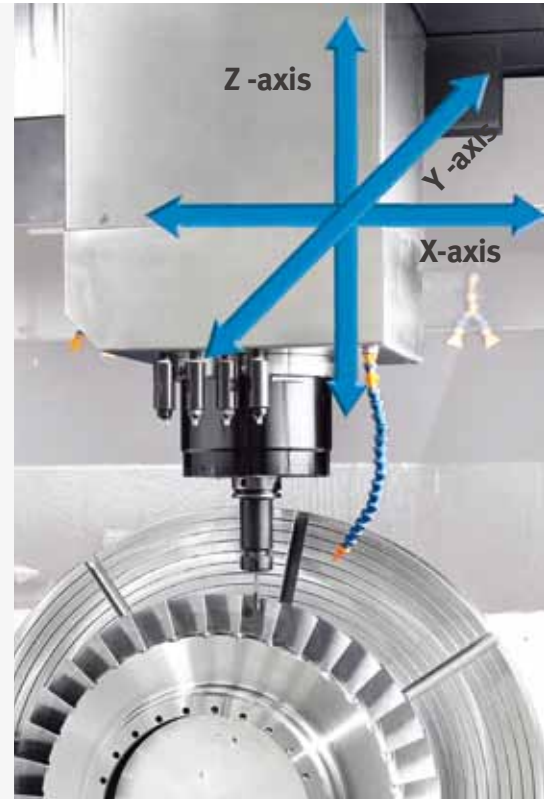

Spindle

We provide stable machining performance with high speed direct and built-in spindle.

Max. Spindle speed

12000/18000 r/min option

Max. Spindle motor power

HEIDENHAIN

30/30 kW option
(40.2/40.2 Hp)

FANUC

22/22 kW option
(29.5/29.5 Hp)

Max. Spindle torque

HEIDENHAIN

155/155 N·m option
(114.4/114.4 ft-lbs)

FANUC

204/118 N·m option
(150.6/87.1 ft-lbs)



Magazine

Servo magazine as standard for high productivity and accuracy.

Servo magazine

40 ea
(60 / 90 / 120 ea) option

Tool to Tool

1.3 sec



Table

Various table specifications from standard specification to DD and turning function

		DVF6500		DVF8000		DVF8000T	
APC		W/O APC	W APC	W/O APC	W APC	W/O APC	W APC
Table		Mill	Mill	Mill	Mill	Mill(w/Turn)	Mill(w/Turn)
Table diameter	mm (inch)	Ø650 x 600 (Ø25.6 x 23.6)	500 x 500 (19.7 x 19.7)	Ø800 x 680 (Ø31.5 x 26.8)	630 x 630 (24.8 x 24.8)	Ø800 (Ø31.5)	-
Work piece dimension	mm (inch)	Ø840 x 500 (Ø33.1 x 23.6)	Ø630 x 430 (Ø24.8 x 16.9)	Ø1000 x 590 (Ø39.4 x 23.2)	Ø730 x 490 (28.7 x 19.3)	Ø1000 x 590 (Ø39.4 x 23.2)	Ø730 x 490 (28.7 x 19.3)
Speed table	rpm	50{80}	50{80}	60	60	600	600
Work load	kg(lb)	600 (1322.8)	500 (1102.3)	1400 (3086.5)	850 (1873.9)	700 (1543.2)	-



* APC (Auto pallet changer)

Major Specifications

DVF 6500/8000



Description		Unit	DVF 6500	DVF 8000	DVF 8000T	
Travel	Travel distance	X-axis	mm (inch)	750 (29.5)	1000 (39.4)	
		Y-axis	mm (inch)	785 (30.9)	900 (35.4)	
		Z-axis	mm (inch)	600 (23.6)	685 (27.0)	
		A-axis	deg	±120		
		C-axis	deg	360		
Feedrate	Rapid traverse	X-axis	m/min (ipm)	45 (1771.7)		
		Y-axis	m/min (ipm)	45 (1771.7)		
		Z-axis	m/min (ipm)	45 (1771.7)		
		A-axis	r/min	25		
		C-axis	r/min	50{DD : 80}	60	600
Spindle	Max. Spindle speed	r/min	12000 {18000}*		18000	
	Max. Spindle power	kW (Hp)	H/H : 30 {30}* (40.2 {40.2}) FANUC : 22 {22}* (29.5 {29.5})		H/H : 30 (40.2)	
	Max. Spindle Torque	N·m (ft-lbs)	H/H : 155 {155}* (114.4 {114.4}) FANUC : 204 {118}* (150.6 {87.1})		H/H : 155 (114.4)	
	Tool shank	-	ISO #40		HSK T63	
Table	Table size	mm (inch)	Ø650 x 600 (Ø25.6 x 23.6)	Ø800 x 680 (Ø31.5 x 26.8)	Ø800 (Ø31.5)	
	Max. Work size	mm (inch)	Ø840 x 500 (Ø33.1 x 23.6)	Ø1000 x 590 (Ø39.4 x 23.2)		
	Max. Work load	kg (lb)	600 (1322.8)	1400 (3086.5)	700 (1543.2)	
ATC	Tool capacity	ea	40 {60, 90, 120}*			
Machine Dimensions	Length x Width	mm (inch)	3700 x 2450 (145.7 x 96.5)	4097 x 2950 (161.3 x 116.1)		

* {} : Option

Doosan Machine Tools

www.doosanmachinetools.com

www.instagram.com/doosan_machinetools

www.facebook.com/doosanmachinetools

www.youtube.com/c/DoosanMachineToolsCorporation

Head Office

22FT Tower, 30, Sowol-ro 2-gil, Jung-gu, Seoul, Korea, 04637

Tel +82-2-6972-0370 / 0350

Fax +82-2-6972-0400

Doosan Machine Tools America

19A Chapin Rd., Pine Brook, NJ 07058, U.S.A.

Tel +1-973-618-2500

Fax +1-973-618-2501

Doosan Machine Tools Europe

Emdener Strasse 24, D-41540 Dormagen, Germany

Tel +49-2133-5067-100

Fax +49-2133-5067-111

Doosan Machine Tools India

No.82, Jakkuar Village, Yelahanka Hobli, Bangalore-560064

Tel + 91-80-2205-6900

E-mail india@doosanmt.com

Doosan Machine Tools China

Room 101,201,301, Building 39 Xinzhuan Highway No.258 Songjiang District,China Shanghai(201612)


Tel +86 21-5445-1155

Fax +86 21-6405-1472

* For more details, please contact Doosan Machine Tools.

* The specifications and information above-mentioned may be changed without prior notice.

* Doosan Machine Tools Co., Ltd. is a subsidiary of MBK Partners. The trademark **DOOSAN** is used under a licensing agreement with Doosan Corporation, the registered trademark holder.



Fire Safety Precautions

There is a high risk of fire when using non-water-soluble cutting fluids, processing flammable materials, neglecting use coolants and modifying the machine without the consent of the manufacturer. Please check the SAFETY GUIDANCE carefully before using the machine.

ver. EN 190305 SU